



WALL

AVIANO™
GLAZED CERAMIC

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Aviano™ Verona White 10 x 14 on the wall.
 Above photo features Aviano™ Trentino Greige 10 x 14 and
 Emerson Wood™ Brazilian Walnut 2 x 2 mosaic on the wall.

The Straight and Narrow

Create your feature wall with the compelling linear structure of Aviano™. Aviano's defined texture delivers a clean, subtle design in a monochromatic color palette, perfect for walls and backsplashes.

- **LINEAR FRAMEWORK**
 - Compelling linear design creates a clean, contemporary and structured look
 - Offered in four modern, monochromatic colors: Verona White, Belluno Beige, Trentino Greige and Civetta Grey
- **SIMPLY STYLISH**
 - On-trend 10 x 14 rectangular wall tile available in a satin finish
 - Coordinating monochromatic jolly trim



**POST-CONSUMER
RECYCLED MATERIALS**



**PRE-CONSUMER
RECYCLED MATERIALS**

All or select items within this series meet the requirements for these qualifications.
 For more information visit daltile.com.

USAGE

Floors

Walls

Countertops



W



GLAZED CERAMIC WALL TILE



VERONA WHITE AV60




CLOSE UP




BELLUNO BEIGE AV61




CLOSE UP

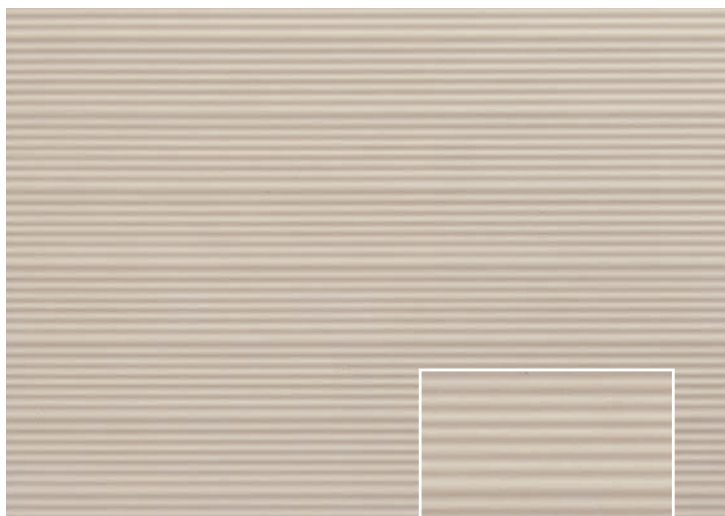


TRENTINO GREIGE AV62



CLOSE UP

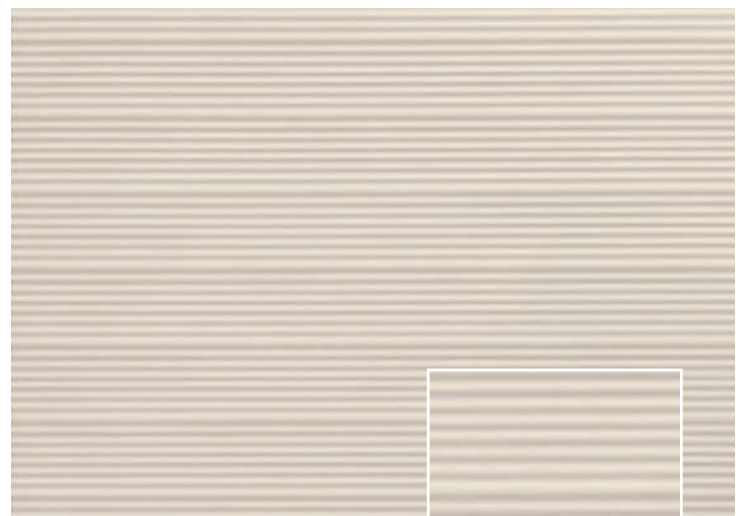


CIVETTA GREY AV63



CLOSE UP

JOLLY TRIM



VERONA WHITE AV60



TRENTINO GREIGE AV62



BELLUNO BEIGE AV61




CIVETTA GREY AV63

WALL

AVIANO™

GLAZED CERAMIC

SIZES

| | | | Thickness | Sq. Ft./ Carton | Pieces/ Carton |
|--|----------------------|---|-----------|--------------------|-------------------|
|  | 10 x 14 Wall Tile | (9-13/16" x 13-15/16") (24.99 cm x 35.40 cm) | 5/16" | 14.25 | 15 |

APPLICATIONS


| | Target DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level – Interior Floor | N/A | |
| Wet & Level – Interior Floor | ≥ 0.42 | |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | ✓ |
| Countertops | N/A | |
| Pool Linings | N/A | |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

TRIM

| Type | Number | Size | Pieces/ Carton |
|--|----------|----------------|-------------------|
|  12" Jolly | S-1/212J | 1/2 x 11-15/16 | 12 |

INSTALLATION

| Grout Joint Recommendation | Shade Variation |
|----------------------------|--|
| Wall: 1/16" |  Low (V1) |

PERFORMANCE CHARACTERISTICS

| | ASTM# | Result |
|---------------------|-------|-------------|
| Water Absorption | C373 | < 20.0% |
| Breaking Strength | C648 | 120-230 lbs |
| Scratch Hardness | MOHS | 4.0-6.0 |
| Chemical Resistance | C650 | Resistant |
| Abrasion Resistance | C1027 | N/A |

For additional information on test results, visit us at: daltile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2018 Daltile (2/18.1)