



WALL

COMPOSITION™

GLAZED CERAMIC

 **daltile**®
IMAGINE WHAT'S POSSIBLE™



Above and cover photos feature Gesso Matte 12 x 24 wall tile.

Created for a Dramatic Finish

Make your room a work of art with Composition tile. Its matte and glossy neutral colors attract architects, designers, builders and homeowners alike. Use the large 12 x 24 size to create grand statements and impressive accent walls. With its crisp graphic and Tru-Edge formatting, Composition is the ideal wall tile for creating dramatic spaces.

- **STYLISH CONFIGURATION**
 - Features Tru-Edge™ to create a sleek, seamless look
 - Neutral color palette complements an array of styles
- **PERFECT FINISH**
 - Available in two finishes for a stylized look
 - Finish the look with coordinating trim



**PRE-CONSUMER
RECYCLED MATERIALS**



REVEAL IMAGING®



TRU-EDGE

All or select items within this series meet the requirements for these qualifications. For more product information, visit daltile.com.

WALL TILE




VISIONARY GLOSS CP05



PROVIDENTIAL GLOSS CP06



CANVAS GLOSS CP03 / CANVAS MATTE CP04

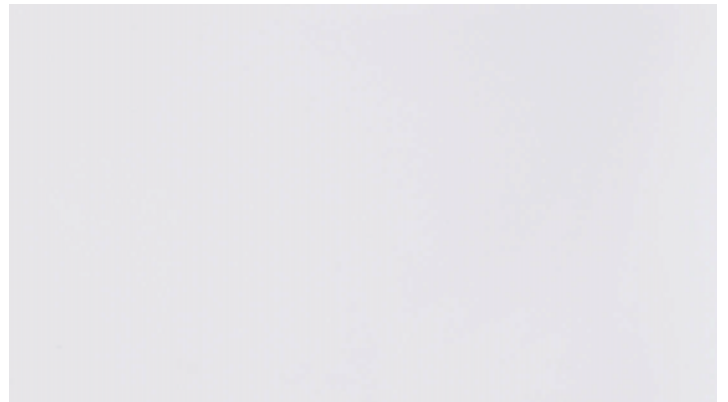

GEDSO GLOSS CP01 / GEDSO MATTE CP02

JOLLY TRIM



VISIONARY GLOSS CP05



PROVIDENTIAL GLOSS CP06



CANVAS GLOSS CP03 / CANVAS MATTE CP04





GEDSO GLOSS CP01 / GEDSO MATTE CP02

WALL

COMPOSITION™

GLAZED CERAMIC

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	12 x 24 Wall Tile	(12" x 24") (30.00 cm x 60.00 cm)	3/8"	11.64	6
	10 x 14* Wall Tile	(9-13/16" x 13-3/4") (25.00 cm x 35.00 cm)	3/8"	11.28	12

* Available in CP01, CP03, CP05 and CP06 only


APPLICATIONS

	Suitable
Floors	
Walls/Backsplashes	✓
Countertops	
Pool Linings	



APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates only when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces per Carton
 12" Jolly	S-1/212J	1/2 x 12	12

INSTALLATION

Grout Joint Recommendation	Shade Variation
12 x 24: 1/8" (3/16" when installing in a staggered brick-joint pattern; overlap should not exceed 33%)	 Low (V1)
10 x 14: 1/8"	 High (V3)*

* CP05 and CP06 only

TEST RESULTS

	ASTM#	Wall Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

For additional information, refer to "Factors to Consider" at daltille.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltillegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltille® products and information, visit our website at daltille.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (10/16)