



FLOOR | WALL

## EXQUISITE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC  
WALL & MOSAIC with REVEAL IMAGING®

 **daltile**®  
IMAGINE WHAT'S POSSIBLE™



Cover photo features Chantilly 12 x 24 field tile in a random brick pattern on the floor.  
Wall features Chantilly 12 x 18 with 2 x 4 brick-joint mosaics on the sink pedestals.  
Above photo features Chantilly 24 x 24 field tile in a grid pattern on the floor.

## Chic Blend of Popular Stone Visuals

The graceful intertwining of travertine cross-cut and vein-cut visuals and textures result in Exquisite's unique interpretation of natural stone. The blend of these travertine characteristics create a refreshing new look that is both trendy and forever timeless. Exquisite's large-format floor and wall sizes and coordinating mosaic can be used to turn any space into a room filled with luxurious splendor.

- **TRENDY VISUALS**
  - Leads trend for dramatic and contrasting graphics
- **DESIGN VERSATILITY**
  - Selection of large floor and wall sizes make the design process easy
- **POPULAR STONE VISUALS**
  - Offers the visual of blended travertine cross and vein-cut at a fraction of the cost
- **SIMPLE UPKEEP**
  - Durable and low maintenance, this tile is an excellent choice for easy care



**POST-CONSUMER RECYCLED MATERIALS**



**PRE-CONSUMER RECYCLED MATERIALS**



**MADE IN THE U.S.A.**



**REVEAL IMAGING®**

All or select items within this series are made in the USA. For more information, visit [daltile.com/Exquisite](http://daltile.com/Exquisite).

**CERTIFIED PORCELAIN TILE**  
0.5% or less water absorption

### GLAZED PORCELAIN FIELD TILE




IVORY EQ10



CHANTILLY EQ11



SILVERSTONE EQ12



MINK EQ13


### GLAZED CERAMIC WALL TILE




IVORY EQ10



CHANTILLY EQ11

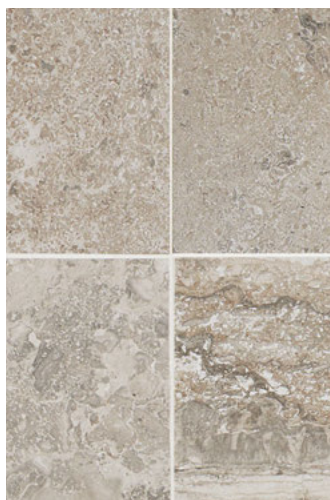

SILVERSTONE EQ12

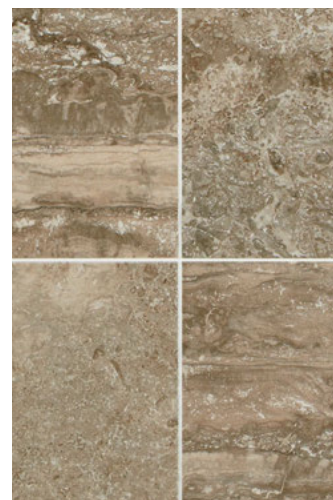

MINK EQ13

### 2 x 4 GLAZED CERAMIC MOSAICS



IVORY EQ10



CHANTILLY EQ11




SILVERSTONE EQ12



MINK EQ13

### DECORATIVE ACCENTS



LIGHT UNIVERSAL DECO EQ14  
4 x 12 Decorative Accent



LIGHT UNIVERSAL DECO EQ14  
2 x 9 Decorative wall Accent



DARK UNIVERSAL DECO EQ15  
4 x 12 Decorative Accent











DARK UNIVERSAL DECO EQ15  
2 x 9 Decorative wall Accent

# EXQUISITE™

GLAZED PORCELAIN FLOOR & GLAZED CERAMIC WALL & MOSAIC with REVEAL IMAGING®

## SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	24 x 24 Field Tile	(23-13/16" x 23-13/16") (59.44 cm x 59.44 cm)	3/8"	15.76	4
	18 x 18 Field Tile	(17-13/16" x 17-13/16") (45.20 cm x 45.20 cm)	5/16"	17.60	8
	12 x 24 Field Tile	(11-13/16" x 23-13/16") (30.00 cm x 60.48 cm)	3/8"	15.60	8
	12 x 12 Field Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	14.55	15
	12 x 18 Wall Tile	(11-13/16" x 18") (30.51 cm x 45.77 cm)	5/16"	16.50	11
	2 x 4 Brick-joint Mosaic	(12" x 12" Sheet) (30.48 cm x 30.48 cm Sheet)	1/4"	9.96	12
	4 x 12 Floor/Wall Decorative Accent	(3-15/16" x 11-13/16") (10.00 cm x 30.00 cm)	5/16"	--	18
	2 x 9 Wall/Floor Decorative Accent	(1-15/16" x 9") (4.92 cm x 22.81 cm)	5/16"	--	28

## FLOOR APPLICATIONS

(Excludes Wall Tile)	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓*
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).






## OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓**
Pool Linings	✓***

### APPLICATION NOTES:

- \* Mosaics suitable for residential and commercial floors including residential and light commercial shower floors.
  - \*\* Excludes wall tile
  - \*\*\* Mosaic tile only
- Floor tile suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.
- Wall tile and mosaic suitable for exterior applications in non-freezing climates only when proper installation methods are followed.


## TRIM

Type	Number	Size	Pieces per Carton
	P-43C9	3 x 12	30
	S-43C9WL	3 x 12	22
	SN-4310	3 x 3	32
	P-36C9TB	6 x 12	22
	PC-36C9TB	1 x 6	15

\* Floor bullnose, cove base, and cove base outcorner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

† Cove base and cove base outcorner are clay body ceramic suitable for non-freezing climates only

## INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 3/16" (overlap should not exceed 33% when installing in a staggered brick-joint pattern)	 Random (V4)
Wall: 1/16" (1/8" when installed in a staggered brick-joint pattern; overlap should not exceed 33%)	
Mosaic: 1/8"	

## TEST RESULTS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs.	120-230 lbs.	> 250 lbs.
Scratch Hardness	MOHS	8,0	4.0-6.0	8.5
Chemical Resistance	C650	Resistant	Resistant	Resistant
Abrasion Resistance	C1027	4	N/A	4

For additional information, visit [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DALTILE.COM](http://GET.DALTILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (7/16)