



FLOOR

**IMAGICA™**  
COLORBODY™ PORCELAIN

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Cover photo features Imagica™ Cosmo, Vision and Midnight 24 x 24 unpolished in a checkerboard pattern. Above photo features Imagica™ Midnight in 8 x 48, 6 x 48 and 4 x 48 in a random staggered brick-joint pattern on the floor.

## Powerful Performance with the Look of Luxury

### USAGE

Floors	Walls	Countertops
F	W	C

Urban skylines and sleek lines inspired the modern, stained concrete look of Imagica™. Fashionable and on-trend, metropolitan-inspired colors like Vision, Cosmo, Haze, and Midnight transform your space into downtown chic. Diverse sizes and large-scale options make this collection a hit for commercial areas. Simple to maintain and very durable, Imagica makes a bold statement.

- **HIGH-PERFORMANCE DESIGN**
  - Modern design mimics a stained concrete look for on-trend appeal
  - Stands up to high-traffic areas requiring ultimate performance standards
- **IDEAL SIZES AND COLORS**
  - Make a statement with stylish color options and cool, contemporary tones
  - Perfectly suited for large projects and open spaces requiring bold design

-  **PRE-CONSUMER RECYCLED MATERIALS**
-  **MADE IN THE U.S.A.**
-  **REVEAL IMAGING®**
-  **TRU-EDGE**

All or select items within this series meet the requirements for these qualifications. For more information visit [daltile.com](http://daltile.com).



**FLOOR TILE**

Available in Unpolished & Light Polished




VISION IG95



HAZE IG97



COSMO IG96

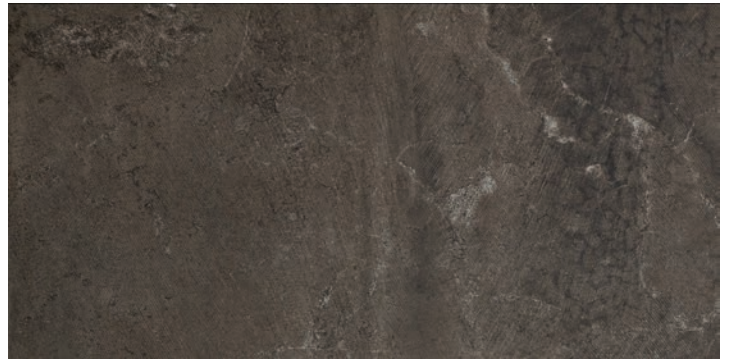

MIDNIGHT IG98

FLOOR

# IMAGICA™

COLORBODY™ PORCELAIN

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 24 Floor Tile ♦	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	3/8"	15.20	4
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	3/8"	15.12	8
	8 x 48 Floor Tile ♦	(7-3/4" x 46-7/8") (19.71 cm x 119.20 cm)	3/8"	15.18	6
	6 x 48 Floor Tile ♦	(5-3/4" x 46-7/8") (14.70 cm x 119.20 cm)	3/8"	15.12	8
	4 x 48 Floor Tile ♦	(3-3/4" x 46-7/8") (9.50 cm x 119.20 cm)	3/8"	7.74	6

♦ Available in Unpolished only

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

\* Unpolished only


## TRIM

	Type	Number	Size	Pieces/ Carton
	Floor Bullnose ♦	S-43C9	3 x 12	30
	Cove Base	S-36C9T	6 x 12	20
	Cove Base Outcorner	SC-36C9T	1 x 6	10

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

♦ Available in Unpolished only

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Random (V4)

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).

7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2017 Daltile (9/17)