



FLOOR

**TIMBER GLEN™**  
COLORBODY™ PORCELAIN

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Photo features Timber Glen™ Cocoa 6 x 24 in a staggered brick-joint pattern on the floor.

## Contemporary Spin on Rustic Hardwood

Timber Glen provides the character of wood-look with a modern twist. This stylized hand-scraped look captures the rich essence of wood planking in five exquisite natural tones. With its contemporary character and natural elegance, Timber Glen offers a discriminating fashion sense to any room.

- MODERN TAKE ON A POPULAR DESIGN
  - Modern, stylized take on traditional wood-looks
  - hand-scraped look adds contemporary styling
- NATURAL DESIGN
  - Six lush nature-inspired tones add warmth and richness to space
  - Size and graphic present s an authentic wood look

 **PRE-CONSUMER  
RECYCLED MATERIALS**

 **TRU-EDGE**

All or select items within this series meet the requirements for these qualifications. For more product information, visit [daltile.com](http://daltile.com)

CERTIFIED  
**PRECELAIN**  
TILE  
0.5% or less water absorption

*Professional*  
**TILE SOLUTIONS**

FLOOR TILE




THATCH P625




DUNE P620



HICKORY P621

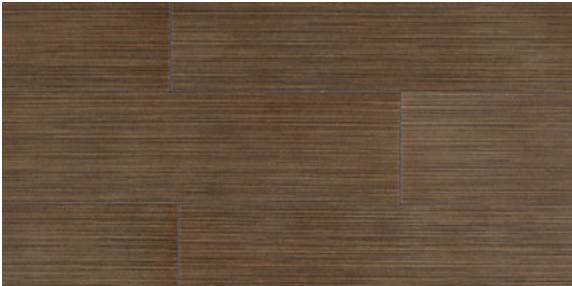

COCOA P623

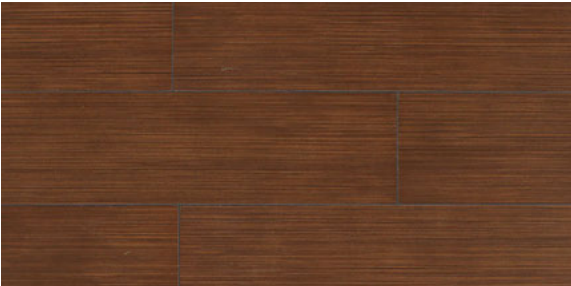

CHERRY P622





ESPRESSO P624

# TIMBER GLEN™

COLORBODY™ PORCELAIN

## SIZES

|  |                    |  | Thickness | Sq. Ft. per Carton | Pieces per Carton |
|--|--------------------|--|-----------|--------------------|-------------------|
|  | 12 x 24 Floor Tile | (11-13/16" x 23-5/8")<br>(30.00 cm x 60.00 cm) | 3/8"      | 11.62              | 6                 |
|  | 6 x 24 Floor Tile  | (5-7/8" x 23-5/8")<br>(15.00 cm x 60.00 cm)    | 3/8"      | 11.62              | 12                |

## FLOOR APPLICATIONS

|   | Target DCOF wet | Suitable |
|---|-----------------|----------|
| Dry & Level – Interior  | N/A             | ✓        |
| Wet & Level – Interior  | ≥ 0.42          | ✓        |
| Exterior Applications;<br>Pool Decking & Other Wet Areas<br>with Minimal Footwear | ≥ 0.60          |          |
| Ramps & Inclines  | ≥ 0.65          |          |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).


## OTHER APPLICATIONS

|                    | Suitable |
|--------------------|----------|
| Walls/Backsplashes | ✓        |
| Countertops        | ✓        |
| Pool Linings       |          |

## APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

## TRIM

| Type   | Number | Size   | Pieces per Carton |
|--|--------|--------|-------------------|
|  Bullnose | S-44F9 | 4 x 24 | 16                |

Bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.

## INSTALLATION

| Grout Joint Recommendation   | Shade Variation   |
|--|---|
| 1/8" (3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%) |  Medium (V2) |

## TEST RESULTS

|                     | ASTM# | Result     |
|---------------------|-------|------------|
| Water Absorption    | C373  | < 0.5%     |
| Breaking Strength   | C648  | > 450 lbs. |
| Scratch Hardness    | MOHS  | 8.0        |
| Chemical Resistance | C650  | Resistant  |

## NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DALTILE.COM](http://GET.DALTILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Daltile (11/16)