



FLOOR

# VOLUME 1.1™

GLAZED PORCELAIN with REVEAL IMAGING®

 **daltile**®  
IMAGINE WHAT'S POSSIBLE™



Cover photo features Volume 1.1™ Tradition Blue, Victory Red and Volume 1.0™ Stereo Grey 12 x 12 on the floor and Volume 1.1™ Tradition Blue, Victory Red and Volume 1.0™ Stereo Grey 12 x 24 on the wall. Above photo features Volume 1.1™ Tradition Blue, Victory Red and Volume 1.0™ Stereo Grey 12 x 12 on the floor.

## Solid Colors for Solid Design

Amp up any space with an eye catching pop of color. Available in multiple colors and in 12 x 12 and 12 x 24 stylish large-format sizes, Volume 1.1™ tile is the perfect material for schools and commercial applications.

- **VIVID DESIGN**
  - Vibrant colors coordinate with the cement graphics and neutral palette of the Volume 1.0™ Collection
  - Inspired looks presented in a variety of sizes
- **RESILIENT PERFORMANCE**
  - Ideal for schools, office and healthcare
  - Designed to be durable in the most active interior spaces



**PRE-CONSUMER RECYCLED MATERIALS**



**MADE IN THE U.S.A.**



**REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more information visit [daltile.com](http://daltile.com).

### USAGE

Floors

Walls

Countertops

F

W

C

CERTIFIED  
**PORCELAIN**  
TILE

0.5% or less water absorption


FLOOR TILE



CHEER YELLOW VL87



ACTION ORANGE VL88

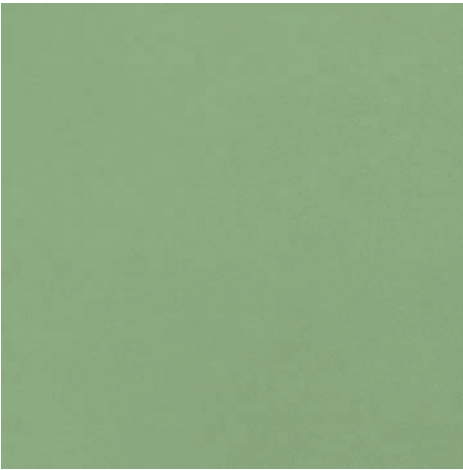


RALLY GREEN VL84



TRADITION BLUE VL89



VICTORY RED VL85

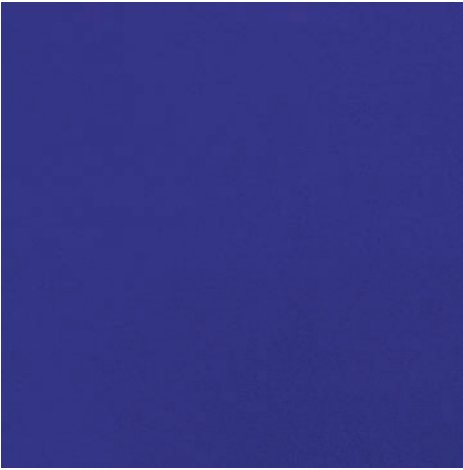



SPIRIT BLUE VL86

# VOLUME 1.1™

GLAZED PORCELAIN with REVEAL IMAGING®

## SIZES

|  |                       |  | Thickness | Sq. Ft./<br>Carton | Pieces/<br>Carton |
|--|-----------------------|--|-----------|--------------------|-------------------|
|  | 12 x 24<br>Floor Tile | (11-13/16" x 23-13/16")<br>(30.00 cm x 60.48 cm) | 3/8"      | 15.60              | 8                 |
|  | 12 x 12<br>Floor Tile | (11-13/16" x 11-13/16")<br>(30.00 cm x 30.00 cm) | 5/16"     | 14.55              | 15                |

## APPLICATIONS


|  | Target<br>DCOF wet | Suitable |
|--|--------------------|----------|
| Dry & Level – Interior Floor   | N/A                | ✓        |
| Wet & Level – Interior Floor   | ≥ 0.42             | ✓        |
| Shower Floors (Residential or Light Commercial)  | ≥ 0.42             |          |
| Exterior Floor Applications<br>(including pool decking & other<br>wet areas with minimal footwear) | ≥ 0.60             |          |
| Ramps & Inclines   | ≥ 0.65             |          |
| Walls/Backsplashes   | N/A                | ✓        |
| Countertops  | N/A                | ✓        |
| Pool Linings   | N/A                |          |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).


### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

## TRIM

|   | Type     | Number | Size   | Pieces/<br>Carton |
|---|----------|--------|--------|-------------------|
|  | Bullnose | P-43C9 | 3 x 12 | 30                |

## INSTALLATION

| Grout Joint Recommendation  | Shade Variation   |
|---|---|
| <p><b>Floor:</b> 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)</p> |  Medium (V2) |

## PERFORMANCE CHARACTERISTICS

|                     | ASTM# | Result    |
|---------------------|-------|-----------|
| Water Absorption    | C373  | < 0.5%    |
| Breaking Strength   | C648  | > 275 lbs |
| Scratch Hardness    | MOHS  | 8.0       |
| Chemical Resistance | C650  | Resistant |
| Abrasion Resistance | C1027 | N/A*      |

For additional information on test results, visit us at: [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

\* The ASTM C-1079-9 does not make provisions for the apparent differences in abrasion values between light and dark colored glazed tiles.

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltile.com/Factors](http://daltile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit [daltile.com](http://daltile.com).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).

7834 C. F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



©2018 Daltile (3/18)