



FLOOR

**YORKWOOD MANOR™**  
GLAZED PORCELAIN with REVEAL IMAGING®

 **daltile®**  
IMAGINE WHAT'S POSSIBLE™



Cover photo features Yorkwood Manor™ Pecan 6 x 36 on the floor.  
Above photo features Yorkwood Manor™ Birchtree 6 x 36 on the floor.

## Design with the Style of Historic New England

Bring the look of New England's historic homes and barns into any setting with Yorkwood Manor™ tile. These porcelain tiles elegantly recreate the intricate detailing of reclaimed wood with deliberate cracked paint and water stain detailing. Richly inspired and filled with character, Yorkwood Manor adds beauty and a sense of history to any space.

- **RUSTIC CHARM**
  - Replicate the authentic look of painted and aged floors with Reveal Imaging® technology
  - Intricate detailing including water stains and wood striations produce a unique, rustic look
  - Plank size simulates the look of real wood
- **MADE TO PERFORM**
  - Durable porcelain tile is ideal for high-traffic and moisture-prone areas

 **PRE CONSUMER RECYCLED MATERIALS**

 **MADE IN THE U.S.A.**

 **REVEAL IMAGING®**

All or select items within this series meet the requirements for these qualifications. For more product information, visit [daltile.com](http://daltile.com).

 **CERTIFIED PORCELAIN TILE**  
© 8% to 10% water absorption

# YORKWOOD MANOR™

GLAZED PORCELAIN with REVEAL IMAGING®


## FLOOR TILE



PECAN YM02



DEEP WALNUT YM03

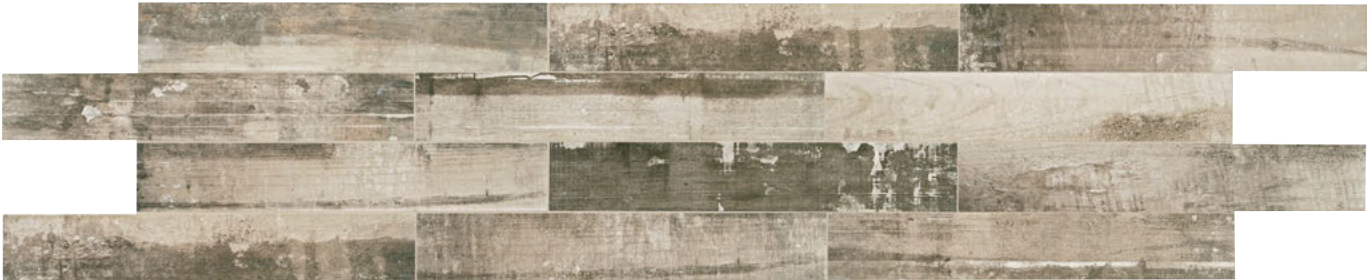


BIRCHTREE YM01

# YORKWOOD MANOR™

GLAZED PORCELAIN with REVEAL IMAGING®

## SIZES

			Thickness	Sq. Ft. per Carton	Pieces Per Carton
	6 x 36 Floor Tile	(5-7/8" x 35-7/16") (15.00 cm x 90.00 cm)	5/16"	13.05	9

## FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications, Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [daltile.com/DCOF](http://daltile.com/DCOF).


## OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

## APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

## TRIM

Type	Number	Size	Pieces Per Carton
 Bullnose	S-43H9	3 x 18	16

Bullnose trim is intended to coordinate with floor tile in the standard 90-degree installation position.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16" (overlap should not exceed 33% when installing tile with a length of 15" or greater in a staggered brick-joint pattern)	 Random (V4)

## TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	4

For additional information, visit [daltile.com/information/TestResults](http://daltile.com/information/TestResults).

## NOTES

Special consideration must be given when installing tiles greater than 15 inches. Please refer to [daltile.com/LargeTiles](http://daltile.com/LargeTiles) for more information.

Use of a latex modified thin-set is recommended for installation.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at [daltile.com/Factors](http://daltile.com/Factors).



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: [GET.DALTILE.COM](http://GET.DALTILE.COM)



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at [daltile.com](http://daltile.com).



IMAGINE WHAT'S POSSIBLE™

©2016 Daltile (12/16)